



HDM M/T/N	Inner Mold B-035-019-A	HDM AW8 4 5	B-027-019
	Outer Mold B-035-019-B		
HDM F T/N	Inner Mold B-025-019-A		
	Outer Mold B-025-019-B		

REV	DATE	CHANGE BEFORE	CHANGES	DRAW
Δ	11.08.30			Huanghui

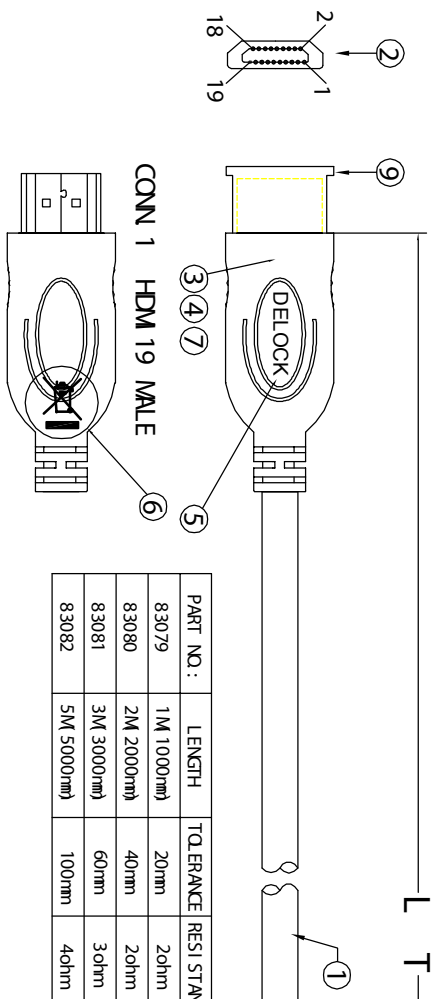


PART NO.:	LENGTH	TOLERANCE	RESISTANCE	PE. Bag
83079	1M 1000mm)	20mm	2ohm	150*265mm
83080	2M 2000mm)	40mm	2ohm	150*265mm
83081	3M 3000mm)	60mm	3ohm	180*265mm
83082	5M 5000mm)	100mm	4ohm	180*265mm




- Electronic Test:**
- Contact Resistance : 4 ohm max
 - Insulation Resistance : 10M ohm min
 - H - Pot : 300V DC/10ms
 - All Materials With RoHS Standard
 - 100% test when it is open and short

9	COVER	HDM MALE HOOD TRANSPARENCE	pcs	1
8	CONNECTOR	HDM 19PIN FEMALE SOLDER INSULATI ON BLACK SHELL GOLD PLATED	pcs	1
7	COPPER FOIL	25*48MM	pcs	2
6	LABEL	' () * + 10*10mm	pcs	1
5	% &	" DELOCK"% &	pcs	1
4	OUTER MOLD	50P PVC COLOR: BLACK	g	20
3	INNER MOLD	LD PE	g	8
2	CONNECTOR	HDM 19PIN MALE SOLDER INSULATI ON BLACK SHELL GOLD PLATED	pcs	1
1	CABLE	UL20276 (28AWG*1P+D+AL+M(L)AR) *5C+4C*28AWG+AL+H OD.7.3 JACKET: BLACK High Speed HDM Cable with Ethernet	mm	L
NO.	NAME	DESCRIPTION	UNIT	QTY

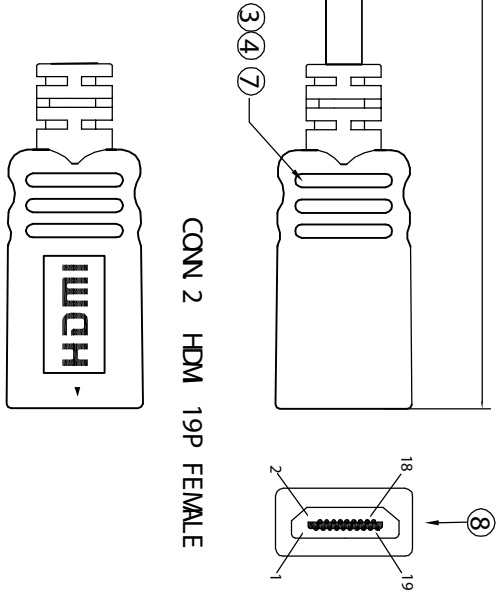

Pin Assignment

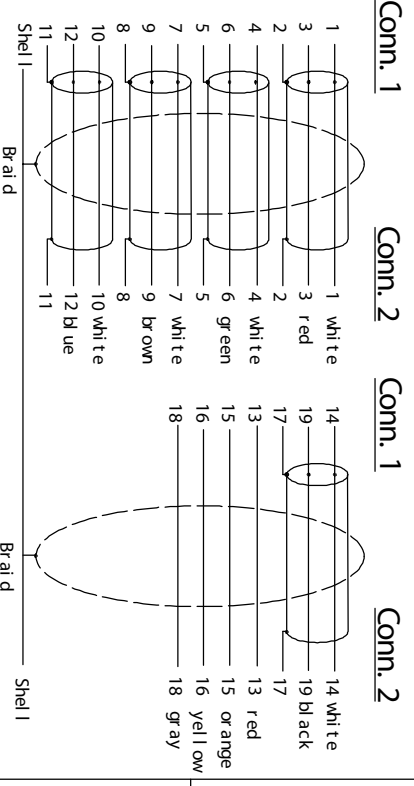

Item no. 83079 - 83082

File: 87740