












# I.D.C. SOCKET 2.54mm (0.100")

**Specifications:**

**Contact Resistance:** 30mΩmax.at DC 100mA  
**Insulator Resistance:** 1000MΩmin.at DC 500V  
**Current Rating:** 1 AMP

**Dielectric Withstanding**

**Voltage:** AC 500V For 1 minute  
**Operating Temperature:** -55°C ∞ +105°C  
**Contact:** Phosphor Bronze  
**Housing:** PBT & 30% Glass Fiber (UL 94V-O)

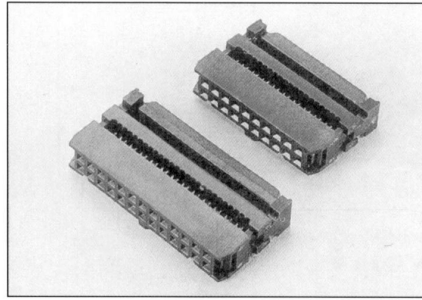

**Dimension**

| Position | Dimension |       |
|----------|-----------|-------|
|          | A         | B     |
| 10       | 17.27     | 10.16 |
| 14       | 22.35     | 15.24 |
| 16       | 24.89     | 17.78 |
| 20       | 29.97     | 22.86 |
| 24       | 35.05     | 27.94 |
| 26       | 37.59     | 30.48 |
| 30       | 42.67     | 25.56 |
| 34       | 47.75     | 40.64 |
| 40       | 55.37     | 48.26 |
| 50       | 68.07     | 60.96 |
| 60       | 80.77     | 73.66 |
| 64       | 85.85     | 78.74 |