

### B24 MAGNETIC (50mph/80kph) ROTATING HALOGEN BEACON

Amber. Polycarbonate Lens. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.


#### B24.00.12V/.24V

Less bulb (.LB) versions available .12LB or .24LB. Specify voltage when ordering.

For operating and fitting details see page 5.

#### Spare Parts

- 10514.00 Amber Lens.
- 27031 Bulb Retaining Clip.
- 14218.00 Single Pole Plug.
- H448 12V (55W) Halogen Bulb.
- H466 24V(70W) Halogen Bulb

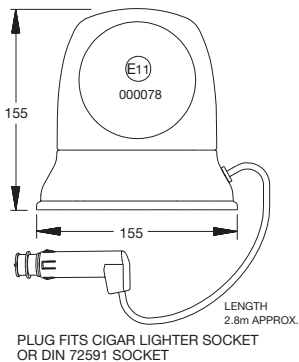

### B24 MAGNETIC (70mph/112kph) ROTATING HALOGEN BEACON

Amber. Polycarbonate Lens. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.


#### B24.70.12V/.24V

Less bulb (.LB) versions available .12LB or .24LB. Specify voltage when ordering.

For operating and fitting details see page 5.

#### Spare Parts

- 10514.00 Amber Lens.
- 27031 Bulb Retaining Clip.
- 14218.00 Single Pole Plug.
- H448 12V (55W) Halogen Bulb.
- H466 24V(70W) Halogen Bulb

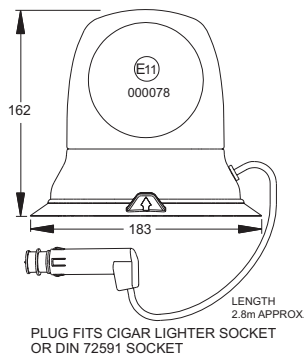

### 324 MAGNETIC (50mph/80kph) ROTATING HALOGEN BEACON

Amber. Polycarbonate Lens. Flash Rate: 160 flashes per minute. Operating Temperature -30° to 50°.

#### 324.00.LB/.12V/.24V

For operating and fitting details see page 5.

Specify voltage when ordering.

#### Spare Parts

- 10398.00 Amber Lens.
- 15244.00 Drive Belt.
- 20378.00 Reflector.
- 27031 Bulb Retaining Clip.
- 29211.00 Pcb Assembly.
- 13204.00 Motor Module Assembly.
- H448 12V (55W) Halogen Bulb.
- H466 24V (70W) Halogen Bulb.
- 14218.00 Single Pole Plug.

